


PXI EXTENSION CARD MODEL 52906

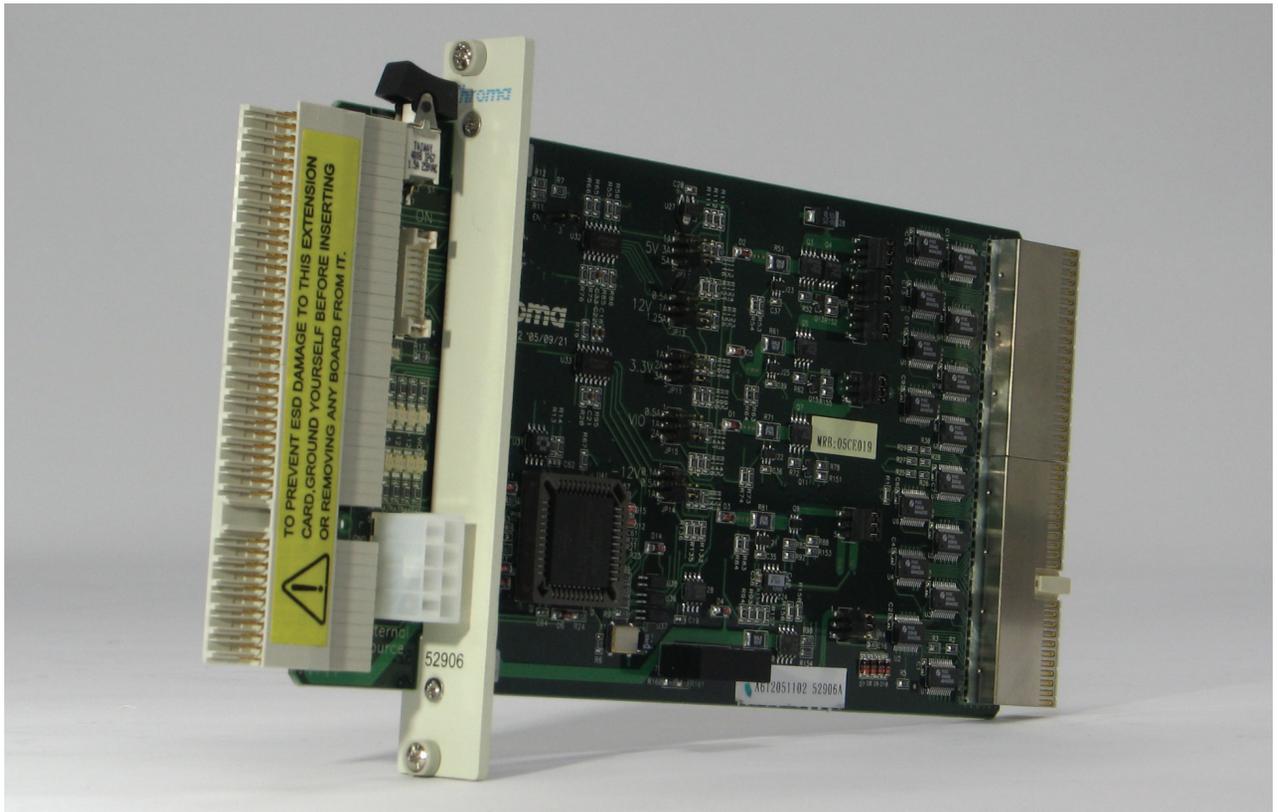

Key Features :

- Extend PXI backplane signals
- 3U 64-bit PXI extension card available for hot swapping PXI card
- Extend PXI bus to outside of chassis, easy for inspection
- Able to use voltage meter to measure the power consumption of +5V, +3.3V, +12V, -12V and VIO
- Use Jumper to control the cutoff current
- Power is controlled by mechanical switches
- Provide external power device
- Provide short circuit protection

The function of PXI extension card is to extend the PXI backplane signal outside of the chassis. Inserting the PXI card to extension card can easily check or measure the PXI card's signal under power on condition, which resolves the problems of inconvenient inspection due to the PXI card inside the chassis for RD or maintenance personnel.

PXI extension card is able to isolate the voltage and signals sent to the PXI card for hot swap when the system is powered on. Every time the extension card activates it can supply the power required for PXI initialization. It eliminates the need for rebooting PC when users read and re-write the configuration files.

PXI extension card allows users to measure the voltage consumption power of PXI standard 5 sets voltage easily using the voltage meter. The extension card has over current protection circuit that can prevent the system backplane and other related components from damage once the PXI card malfunctions. Jumpers on the extension card are available for users to define the current range for protection; in addition an outward power connector is attached to supply the power externally instead of using the backplane power.

SPECIFICATIONS

Model	52906
Bus	PXI / Compact PCI 32 or 64 bit
Input requirement	5V at 250 mA, 12V at 100 mA, -12V at 100 mA
Inputs for UUT	From chassis or the external power, configurable by jumpers for each power source
Output Current Limit Protection	5V, up to 5 Amps, 3 limitations jumper selectable 3.3V, up to 3 Amps, 3 limitations jumper selectable VIO, up to 2 Amps, 3 limitations jumper selectable 12V, up to 1.25 Amps, 3 limitations jumper selectable -12V, up to 1 Amp, 3 limitations jumper selectable
Output Voltage Drop	0.07 volts drop for every 1 Amp drawn for 5V, 3.3V and VIO; 0.25 volts drop for every 1 Amp drawn for 12V; 0.15 volts drop for every 1 Amp drawn for -12V
Propagation Delay	Less than 500 pico-seconds from the PC bus to the UUT. (switch propagation delay is rated at 250 Pico-seconds)
UUT ON-OFF Controls	Via SPST switch on-board
Outputs	Current draw by the UUT can be measured at connector J5 for 5V, 3.3V, 12V, -12V and VIO. Each volt represents 1 Amp.
Current Sense Accuracy	Typical below 6% for 5V, 3.3V, 12V, and VIO; below 15% for -12V (see section 2.4 for details)
Mechanical Dimensions	100 x 220 mm (3U high)

All specifications are subject to change without notice.

ORDERING INFORMATION

52906 : PXI Extension Card



Test Board



CHROMA ATE INC.
No. 66, Hwa-Ya 1st Rd., Hwa-Ya
Technical Park, Kuei-Shan
Hsiang, Taoyuan Hsien, Taiwan
Tel: +886-3-327-9999
Fax: +886-2-327-8898
E-mail: chroma@chroma.com.tw

U.S.A.
7 Chrysler Irvine CA 92618
Tel: +1-949-421-0355
Fax: +1-949-421-0353
Toll Free: 1-800-478-2026

EUROPE
Max Planckstraat 4, 6716 BE
Ede, The Netherlands
Tel: +31-318-648282
Fax: +31-318-648288

CHINA
8F, No4, Nanyou Tian An Industrial Estate,
Shenzhen, China
PC: 518052
Tel: +86-755-2664-4598
Fax: +86-755-2641-9620